



Wi-Fi instructions

Integration of a Wi-Fi capable
Grünbeck product into a Wi-Fi network

grünbeck


How to integrate a Wi-Fi capable Grünbeck product into a Wi-Fi network



Install the myGrünbeck app on your smartphone or tablet. In order to successfully integrate your Grünbeck product into a Wi-Fi network, it is necessary to perform the following steps. To do so, have a pen, paper and the password of your home network handy.

Peer-to-peer connection

- 1 Make sure that you are in close proximity to your Grünbeck product.
- 2 Search for available Wi-Fi connections in the settings of your smartphone or tablet.

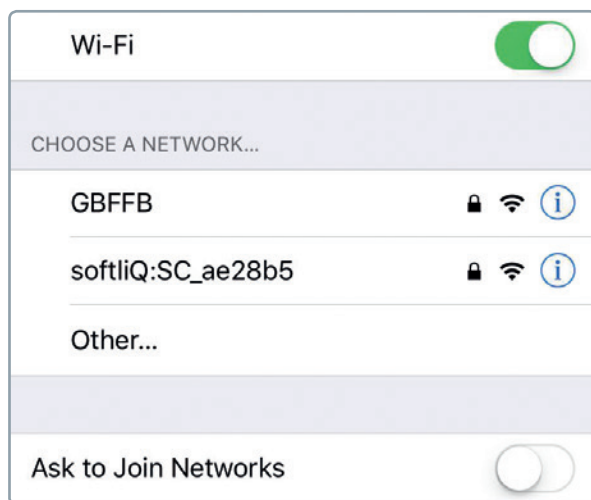


- 3 Select the SSID (Wi-Fi name) of your Grünbeck product.
i Note: In case no available SSID is indicated, disconnect the Grünbeck product from mains for at least 10 seconds. Make sure that the Grünbeck product is NOT in regeneration mode when doing so. Afterwards, start again with item 1.




How to integrate a Wi-Fi capable Grünbeck product into a Wi-Fi network



- 4 Enter the 8-digit password. You may find the password in the following menu level in the control unit of your Grünbeck product:
„Information“ -> Enter -> „Information 4“ in case of softliQ:SC or -> „Information 3“ in case of softliQ:MC, PA and safeliQ:EA

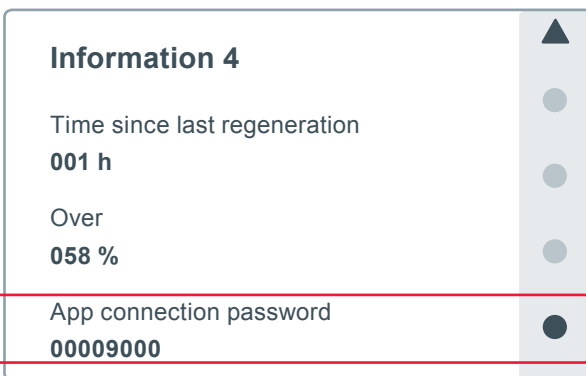


- 5 Your smartphone or tablet has successfully been connected to your Grünbeck product.

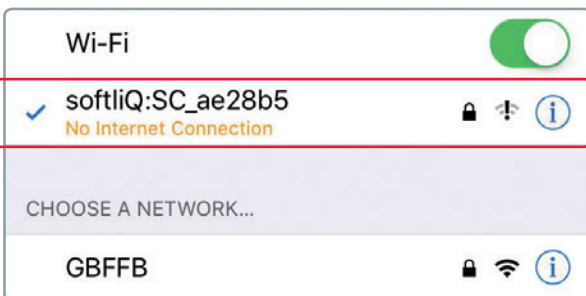

Integration of your Grünbeck product into your home network.

- 6 Open the myGrünbeck app.
7 Select “Settings”.
8 Select “Wi-Fi configuration”.

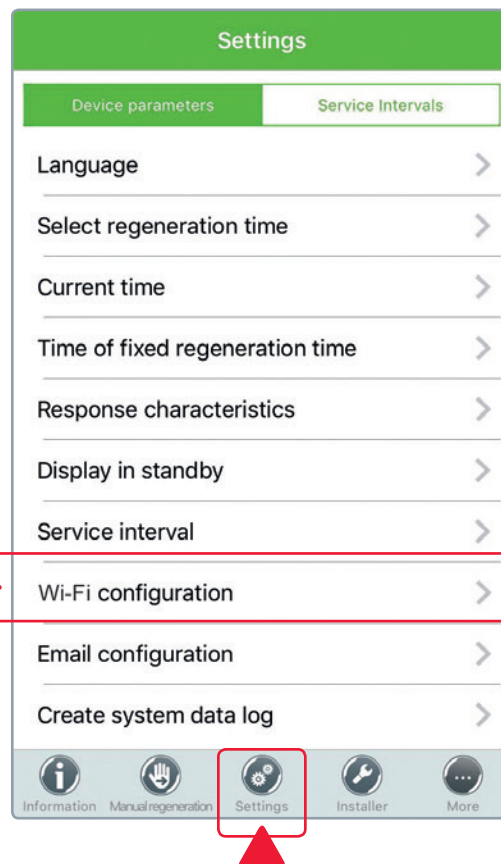

How to integrate a Wi-Fi capable Grünbeck product into a Wi-Fi network



9 Activate "Search for networks".

Network status home Wi-Fi	
SSID	-
IP address	---.---.---.---
Default gateway	---.---.---.---
Primary DNS	---.---.---.---
Secondary DNS	---.---.---.---
Status	not connected

Search for networks

10 Select your home network.

Network status home Wi-Fi	
SSID	-
IP address	---.---.---.---
Default gateway	---.---.---.---
Primary DNS	---.---.---.---
Secondary DNS	---.---.---.---
Status	0

Please select Wi-Fi to connect

GBFFB

Cancel

How to integrate a Wi-Fi capable Grünbeck product into a Wi-Fi network



- 11 Enter the password of your home network and confirm with "Submit".

Network status home Wi-Fi

SSID
IP address
Default gateway
Primary DNS
Secondary DNS
Status 0

Please enter password for Wi-Fi GBFFB

Cancel Submit

Network status home Wi-Fi

SSID
IP address
Default gateway
Primary DNS
Secondary DNS
Status 0

Successfully connected to Wi-Fi GBFFB

Ok

- 12 Write down the IP address indicated in "network status home Wi-Fi", without "/24".
- It may take up to 2 minutes for the IP address to be displayed in the myGrünbeck app.

Network status home Wi-Fi

SSID	GBFFB
IP address	192.168.179.68/24
Default gateway	192.168.179.1
Primary DNS	192.168.179.1
Secondary DNS	0.0.0.0
Status	1

Search for networks

Reset Wi-Fi Settings

Wi-Fi settings


SSID	softliQ:SC_ae28b5
IP address	192.168.0.1/24
Status	1

- 13 Completely exit the myGrünbeck app.

How to integrate a Wi-Fi capable Grünbeck product into a Wi-Fi network



- 14 Connect your smartphone or tablet to your home network.

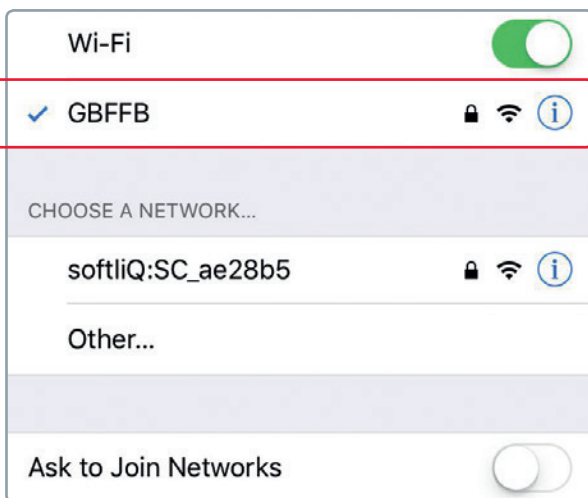

- 15 Open the myGrünbeck app.

Do you need help?


Our service hotline will be pleased to assist you.

Phone: +49 9074 41-333

Mo. – Thur.: 7:00 am – 6:00 pm

Friday: 7:00 am – 4:00 pm

- 16 Now enter the IP address, you wrote down in item „12“.

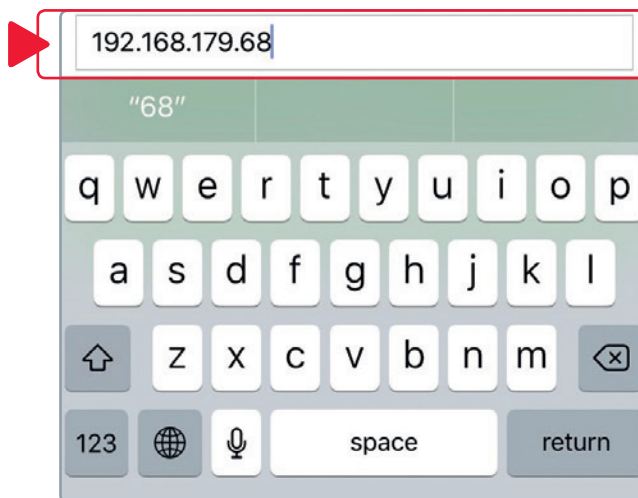

- 17 Activate „Connect“.

- 18 Your Grünbeck product has been successfully integrated into your home network.

For Pros:

Most routers change the assigned IP addresses at certain intervals. Therefore, the IP address of your Grünbeck product may change as well. In many routers, you may select the function “permanent IP” to prevent this.

Grünbeck Wasseraufbereitung GmbH
Josef-Grünbeck-Str. 1
89420 Höchstädt/Germany

+49 9074 41-0
+49 9074 41-100

info@gruenbeck.com
www.gruenbeck.com



A company certified by TÜV SÜD
in accordance with DIN EN ISO 9001,
ISO 14001 and SCC*
www.tuev-sued.de/ms-zert



Follow us on Facebook!

grünbeck